
# VCM 200 Series Cutting Machine



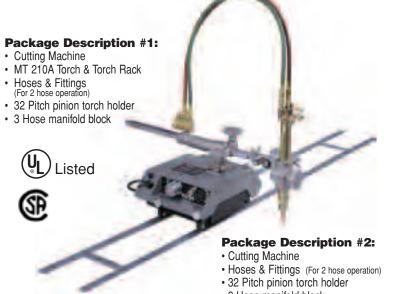

• 3 Hose manifold block

VCM200 SERIES ORDERING INFORMATION			
Model	Part No.	Speed Range/Minute	Pkg. Includes
VCM 200	0200-0220	1"/25.2mm to 60"/1.52mm	See Package Description #1
VCM 200HS	0200-0224	(High Speed) 5"/13cm to 120"/305cm	See Package Description #1
VCM 200HT*	0200-0240	1"/25.2mm to 60"/1.52mm	See Package Description #1
VCM 201	0200-0221	1"/25.2mm to 60"/1.52mm	See Package Description #2
VCM 201HS	0200-0225	(High Speed) 5"/13cm to 120"/305cm/	See Package Description #2
VCM 201HT*	0200-0241	1"/25.2mm to 60"/1.52mm	See Package Description #2

\* Models VCM-200HT, VCM-201HT, Include Heat Shield

**Export Models** available with 220AC to 110 AC step down transformer. Standard Machine 110AC (Call Victor<sup>®</sup> for details).

ACCESSORY ORD	ERING INFORMATION

Part Number	Description
0212-0018	. 12 foot track section for line cutting
0212-0019	. 9 foot track section for line cutting
0212-0005	. 6 foot track section for line cutting
0252-0040	. Radius rod for circle cutting
0253-0042	. 100 inch radius rod for circle cutting
0252-0136	. Dual torch mount assembly
0252-0103	. Heat Shield

#### For Machine Torches: see pages 79-81.

## VCM 200 Portable Cutting Machine

**The versatile VCM-200** is a precision, tractor-type machine that can be used on its own track for straight line cutting and a variety of welding operations. Off track and with a radius rod assembly, the VCM 200 can be used for circle cutting.

### VCM 200 Features

- Large thumb screws for hand tight adjustments.
- Dual drive controls & direct speed readout.
- Cone disc drive.
- Constant speed AC induction motor located on the side opposite the torch for cooler, more efficient operation.
- Counter-balanced design allows torch racking distance up to 18" from the machine.
- Speed constant over wide range of temperatures.
- Torch holder designed for 1-3/8"/35mm barrel diameter torches.

## **Specifications**

- Straight Line / Circle
- Length increments of 72"/1.83m (Track length)
- Circle diameters 4"/100mm to 96"/2.44m

#### **Speed Range**

• 1"/25.2mm to 60"/1.52m/Minute

#### Dimensions

- Length 14.25"/359mm
- Width 11"/277mm (Machine Only) 28.5"/718mm (Machine & Torch Holder)
- Height 11.5"/289mm (Top of Torch Holder) 5.5"/138mm (Top of machine)

#### Weight

• Machine - 47.0 lbs./21kg

## VCM 200 HS (High Speed)

Has all the convenience and portability features of the standard VCM-200 machine, plus a speed range of 5"/13cm to 120"/305cm / Minute. The VCM-200HS has a flat mounting deck.

### VCM 200 HT (High Temperature)

Same convenience, portability features and speed of the VCM-200 (Max. temp.300° F), plus the addition of a heat shield.